


- Accuracy: $\pm 0.1\%$ F.S. ± 1 digit
- High brightness 0.4" LED; Rate of display range: 0~99999
- Rate / Total decimal point selectable
- Time unit selectable: sec / min / hour / day / month
- Total scale programmable (0.0001~9.9999)
- Reset for Total by external control input

- Roof square function available for analog input
- Displacement function for environment monitor application
- 2 Alarms for Rate / 2 alarm for Total (Alarm 1 programmable) / Pulse Output / Analog Output (16 bit resolution) / RS-485 communication optional (The above options can exist together)
- High stability, non-flammable case (PC), high safety
- CE approval

SPECIFICATION

- ◆ Accuracy: $\pm 0.1\%$ F.S. ± 1 digit
- ◆ Display Screen: High brightness red LED; 10.16mm(0.4")
- ◆ Sampling Time: 16 cycles / sec
- ◆ Display Range: Rate: 0~99999
Total: 0~99999999999
- ◆ Zero Adjustment: Rate: 0~99999
- ◆ Over Range Indication: doFL / ioFL or -doFL / -ioFL
- ◆ Polarity Indication: Automatic with "-" indication
- ◆ Parameters Setting: Push buttons
- ◆ Back Up Memory: EEPROM
- ◆ Alarm Action: Rate: " \geq (Hi) on" or "< (Lo) on"
Total: " \geq (Hi) on"
- ◆ Alarm Run Delay Time: 0~99 sec
- ◆ Relay Contact: AC 277V / 7A; DC 30V / 7A
- ◆ Analog Output Resolution: 16 bit
- ◆ Output Response Time: <250 msec (0~90%)
- ◆ Output Communication: Voltage Output: <20mA
Current Output: <10V
- ◆ Communication: RS-485 Modbus RTU mode
- ◆ Baud Rate: 19200 / 9600 / 4800 / 2400 bps
- ◆ Temperature Coefficient: 100ppm / $^{\circ}\text{C}$ (0~60 $^{\circ}\text{C}$)
- ◆ Operating Temperature: 0~60 $^{\circ}\text{C}$
- ◆ Operating Humidity: 20~90% RH (non-condensing)
- ◆ Storage Temperature: -10~70 $^{\circ}\text{C}$
- ◆ Storage Humidity: 20~90% RH (non-condensing)
- ◆ Power Supply: AC/DC 100~240V; DC 12 / 24 / 30~90V
- ◆ Power Consumption: 8.5VA (all functions output)
- ◆ Surge Test: 1.5KVac / 1min (Input / Power)
- ◆ Input Impedence: Voltage: >2V for 20K Ω / V; $\leq 2\text{V}$ for >200M Ω
Current: $\geq 0.2\text{A}$ at 100mV; <0.2A at 1V

WIRING CONNECTION

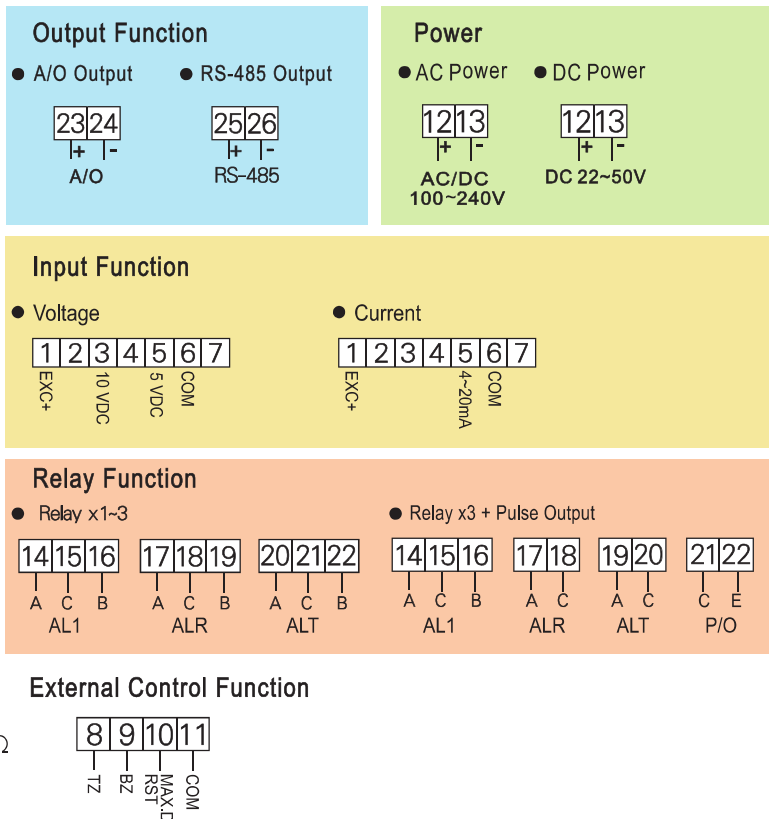

ORDER INFORMATION

Code1	Input Type	Code3	Aux. Power	Code5	Rate Alarm Output	Code8	Analog Output
D	DC	A	AC/DC 100~240V	N	None	N	None
2	2, 3 Wire Sensor	C	DC 22~50V	R	1 Relay	A	4~20mA
4	4 Wire Sensor					V	0~10V
				Code6	Total Alarm Output	O	Option
Code2	Input Signal	Code4	Alarm 1 Setting	N	None	Code9	RS-485
A6	4~20mA	N	None	T	1 Relay	N	None
V3	1~5V	R	Rate Alarm x 1			Y	Yes
V4	0~10V	T	Total Alarm x 1	Code7	Pulse O/P		
O	Option	B	Batch Alarm x1	N	None		
				P	P/Count		

MTA - [Code1] [Code2] - [Code3] - [Code4] [Code5] [Code6] [Code7] [Code8] [Code9]

**1: 2 wire type offers excitation power DC24V for 2 wire (Loop Power) flow sensors using.
2: 3.4 wire type offers excitation power DC24V for 3, 4 wire (Loop Power) flow sensors using.